



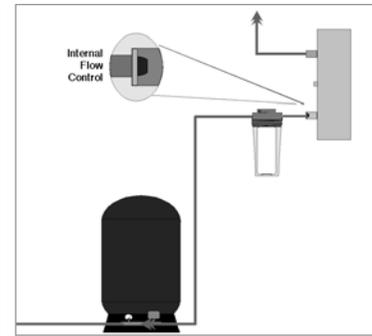

Water entering the disinfection unit flows in the space between the quartz sleeve and the chamber wall. Turbulent flow through the unit insures exposure of micro-organisms to lethal dosages of ultraviolet rays. Water exiting the chamber is safe and ready to use.

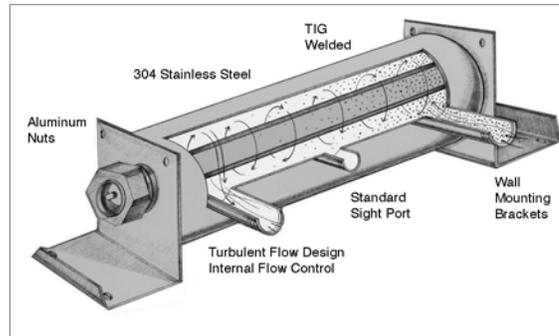

Typical Installation

Part Number	Supplier Part #	Max GPM	# of Lamps	KW @ 120V	AMPS @ 120V 220V	Pipe Size	Dimensions LxWxD	Lamp Out Alarm
-------------	-----------------	---------	------------	-----------	------------------	-----------	------------------	----------------

Safe Lite Economy Series

XXXX	UVSL8	8	1	0.07	.60 .30	1" MIP 3/4" FIP	18"x4"x7"	8.5 No
------	-------	---	---	------	---------	-----------------	-----------	--------

Standard Series

	UV7	7	1	0.07	.60 .30	1" MIP 3/4" FIP	18"x4"x7"	17 No
XXXX	UV15	15	1	0.07	.60 .30	1" MIP 3/4" FIP	36"x4"x7"	28 No

GDS Series w/ Lamp out alarm

	UV7SE	UV7GDS	7	1	0.07	.60 .30	1" MIP 3/4" FIP	18"x4"x7"	17 Yes
	UV15SE	UV15GDS	15	1	0.07	.60 .30	1" MIP 3/4" FIP	36"x4"x7"	28 Yes

Lamp out circuit board provides a visual and audible alarm when a lamp outage occurs.

Solenoid protection can be added via the on-board relay and the purchase of an UVS079 Solenoid. 220V 50Hz less power cord net adder \$ 35.72. Not available on SE series.



UVM254



UVS079

Part Number	Description	For Use With Series
Accessories		
UVM254	UV Dosage meter w/ alarm	UV, UV-W
UVS079	Shut-Off Solenoid 1" FNPT, use w/ UVM254, UV, UV-W, or UVM257 Specify when ordering	UV-SE, UVC